

NEW!

Heat Spreader HSD Series



Thin and flexible heat spreading sheet for superior thermal management


- Aluminum heat spreader material with excellent thermal conductivity (221 W/m·K)
- Spreads heat away from hot spots to cooler areas to prevent components from overheating
- Optional electrically insulating mylar (PET) layer can be applied upon request
- Ideal thermal solution for hot spots on space conscious applications such as mobile devices, tablets, routers, video streaming devices, etc.

Specification


(The values below are not guaranteed)

Part Number	Standard	HSD-0.07	HSD-0.22	HSD-0.30
Total Thickness (mm)	—	0.07	0.22	0.30
Surface Thermal Conductivity (W/m·K)	JIS R 2616 (hot-wire method)	221 (Aluminum)		
Peel Strength (N/25mm)	JIS Z 0237:2009	>6	>16	>11
Flame Resistance	UL94	UL510 Equivalent	—	—
Operating Temperature (°C)	—	-20~100		


HSD-0.07

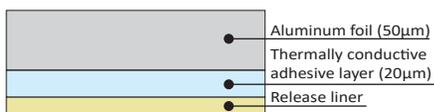


HSD-0.22

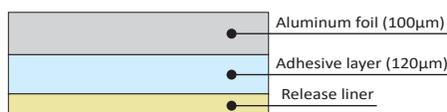


HSD-0.30

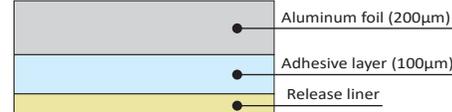

Heat dissipation effect (heat distribution)

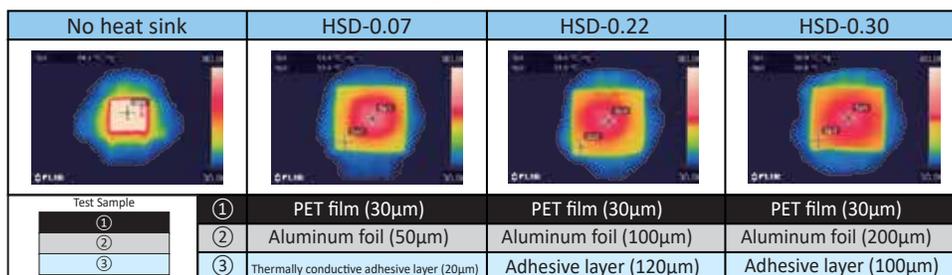


HSD Series Heat Dissipation Effect

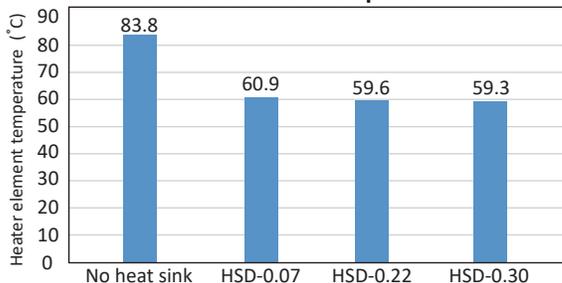

<Test Condition>
Heater element: □ 25mm (1.5W)
Test Sample: □ 50mm

Testing method

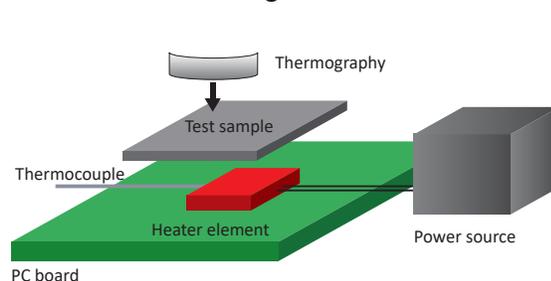

All statements, specifications, properties, technical information, and recommendations herein are based on tests; however, the accuracy and completeness are not guaranteed and are subject to change without notice due to product improvement and specification change. This statement is made in lieu of all warranties, expressed or implied, including the implied warranties of marketability, and fitness for purpose. KITAGAWA INDUSTRIES America, Inc. obligation under this warranty shall be limited to replacement of product that proves to be defective. Prior to use, the user shall determine the suitability of the product for its intended use, and the user assumes all risk and liability whatsoever in connection therewith. KITAGAWA INDUSTRIES America, Inc. shall have no liability for any injury, loss, or damage arising out of the use of or the inability to use the products. No statement or recommendation contained herein shall have any force or effect unless in an agreement signed by officers of seller and manufacturer.

KGS KITAGAWA INDUSTRIES America, Inc.

2325 Paragon Drive, Suite 10, San Jose, CA 95131

Tel: 1-855-EMC-PART (1-855-362-7278) Email: sales@kgs-ind.com

www.kgs-ind.com

Please request for detailed product specification data prior to purchase

Volume resistivity stated on our EMI absorber flyer is meant for noise control parameters, where the absorber is considered a conductor, but not for insulation performance. Care should be taken when using absorbers. KITAGAWA INDUSTRIES America, Inc. makes no guarantees as to electrical resistivity values and accepts no liability due to short circuits where EMI absorbers are used directly on a PC Board or areas near high voltage such as for power. The products are designed for EMI noise reduction for electronics. This is not recommended for applications involving human life or extremely high accuracy. Prior to using the products in production, please verify their performance or adhesive strength of PSA for long term use. Avoid applying any external stress such as bending or high amounts of tension. Note when the absorber products are cut, bent, or pulled, there may be a possibility of creating cracks. For storage, keep products in a cool, dry, well-ventilated area at room temperature and avoid high temperatures, humidity, and direct sunlight.

Please contact the sales department at KITAGAWA INDUSTRIES America, Inc. for the use of our products prior to selecting the parts for your application.

Heat Spreader_HSD Series_REV1_06182018